

## WIRED WEB TCP/IP and SNMP

All the Transmitters of the line WIRED shares the full HTML5 Responsive Graphic Interface and implement a set of SNMP oids than cover the total remote control of the equipment.



**Touch Screen control logic with full WEBSNMP, Web page, no use JAVA, able to work in any Browser: Iphone, Android or any Tablet. Fully remote controlled without any additional option required.**

# WEB INTERFACE

## Main page of Web interface on Exciter/Modulator



CTE TX1000-HD 1000W

RF STATUS: ON    MODE: REMOTE    AF INPUT: STEREO    SWITCH MODE: MANUAL    RDS STATUS: ON    CURR

### TX INFO

RF Status ON

Ypa [V]  
10.2

Ipa [A]  
7.5

Temperature [°C]  
27

Alarms

- PI Unlocked ON
- Power Amp Overhaul ON

CTE TX1000-HD 1000W

RF STATUS: ON    MODE: REMOTE    AF INPUT: STEREO    SWITCH MODE: MANUAL    RDS STATUS: ON    CURRENT DATASET: 0

### TX Settings

GENERAL    INPUT PARAMETERS    RDS

Dataset 0

Frequency 0  
10100

Reference Deviation 0 [KHz]  
75

Target Power 0  
50

Limiter 0  
Clf

CTE TX1000-HD 1000W

RF STATUS: ON    MODE: REMOTE    AF INPUT: STEREO    SWITCH MODE: MANUAL    RDS STATUS: ON    CURR

### NETWORK PARAMETERS

IP Address  
192.168.010.151

Subnet Mask  
255.255.255.000

Gateway  
192.168.010.001

CTE TX1000-HD 1000W

RF STATUS: ON    MODE: REMOTE    AF INPUT: STEREO    SWITCH MODE: MANUAL    RDS STATUS: ON    CURRENT DATASET: 0

### HISTORY ALARMS

EXPORT CSV    CLEAR EVENTS

10:36:0-1/2/19	Normal
10:36:0-1/2/19	Power on
10:36:0-1/2/19	Interlock
10:36:0-1/2/19	Normal
10:36:0-1/2/19	Low Power
10:36:0-1/2/19	Stand-by
10:36:0-1/2/19	Stand-by
10:37:0-1/2/19	Low Level
10:37:0-1/2/19	Interlock
10:37:0-1/2/19	Stand-by
19	Stand-by
19	Interlock
19	Interlock
19	Stand-by
19	Interlock
19	Interlock
19	Stand-by
19	Interlock

CTE TX1000-HD 1000W

RF STATUS: ON    MODE: REMOTE    AF INPUT: STEREO    SWITCH MODE: MANUAL    RDS STATUS: ON    CURRENT DATASET: 0

### SYSTEM SETTINGS

Time [hh:mm:ss]    Date [dd/mm/yyyy]  
10:35:39    02/02/19

LAN IF Firmware Version    TX Firmware Version  
2.0    Fw. 3. 0

Serial Number    Equipment  
812303    TX1000-HD

Password    Import LAN IF Firmware Scelgi file nessuno selezionato

## Wi-Fi Remote Control with any Tablet or Smart Phone.

Works with any Browser, runs under any operating system, IOS, Android, Windows, OSX and in any kind of devices PC, Tablet or Smartphone.

Thanks to the WCU it's possible to see all the transmitter parameter and the ones related to the amplifiers modules and fully control the transmitter.

List of parameters that can be read:




**STATUS**

**ON AIR**

TIME: 14:20:38

LOCAL

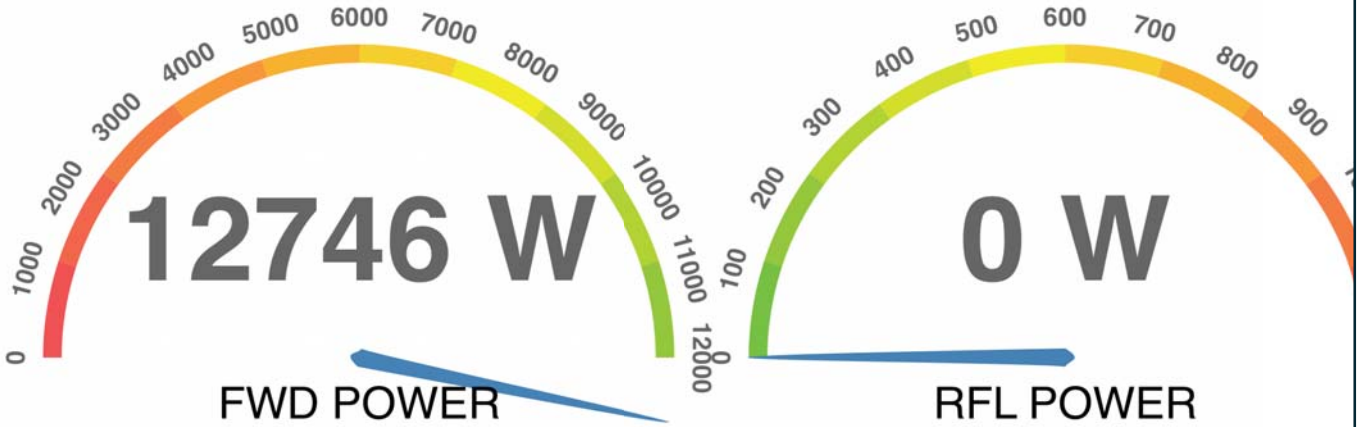

**12746 W**

**0 W**

FWD POWER

RFL POWER

**POWER SET 12500 W**

RF ON

RF OFF

RESET

MENU

MODULES

MODULE 1



- RF ON  ON AIR  INTERLOCK
- LOCAL  CONNECTED  -3dB
- ALARM  FAULT  VSWR
- RESET



VPA



IPA



17 W



2103 W



43 °C